



CASE ERECTOR PRIMARY CE-20TB

BRIF INTRODUCTION

Case Erectors is used to erect carton which have been shaped automatically and use tape or hot glue as sealing materials to seal the bottom cover of carton.

A stack of corrugated blanks are knocked down and placed into the machine. The blanks are pulled out of the machine one-by-one and formed into cases. The newly formed cases are sealed at the bottom with tape or glue

This machine can be used for widely range, such as household appliances, spinning, food, general merchandise, medicine, chemical industry, ceramics, stoker industry and so on.

LOV (THAI) CO.,LTD.


100 Soi Nakkila Laemthong 3, Krungthepkreetha Road, Saphansung Bangkok 10240

Tel: +66-2735-7755 Mobile: +669-2602-8822 Email: center@lovthai.com



CASE ERECTOR

PRIMARY CE-20TB

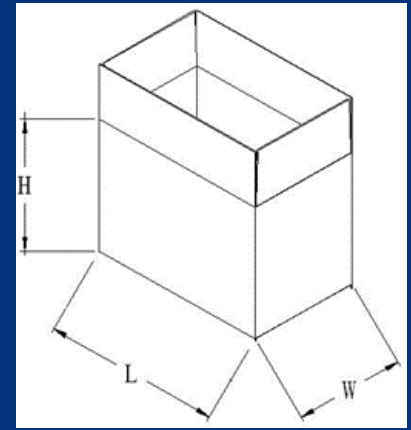


DRAWING OF CARTON SIZE

BASIC PARAMETER

ITEM	CE-20TB
Machine weight	1140kg
Machine dimensions L/W/H	L2713mm x W2468mm x H1732mm
Robot	AZR-2-10-F/795 (Power : 1.2 kW)
Carton sealing adhesive tape	Kraft paper tape, BOPP adhesive tape
Carton size	L260-480 x W160-380 x H160-380mm
Tape width	48mm - 72mm
Installed power	4 kW
Working air pressure	6Kgf/cm ²
Current protection	IP54
Noise	≤75dB(A)
Environmental conditions	Relative humidity≤98%, temperature 0°C-40°C
Working speed	20-30 cartons/min. (depending on carton size and material)
Power supply	1P, 220V, 50/60Hz
Carton erection mode	Vertical erection by a robot
Machine operation	One-click switch for different carton sizes (touch screen preset call and manual micro-assistance when carton specifications are changed)

Working principle

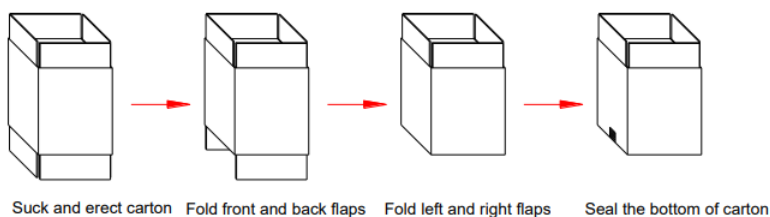

LOV (THAI) CO., LTD.

100 Soi Nakkila Laemthong 3 , Krungthepkreetha Road,Saphansung Bangkok 10240

Tel : +66-2735-7755 Mobile : +669-2602-8822 Email : center@lovthai.com www.lovthai.co.th

